


# 密封型 IO 信号分线盒



## 产品特点

- 小型化密封型设计，有效防止异物进入；
- 可对应各种终端输入信号连接使用，配有 3P 信号输入接口，可接入 2 线制或 3 线制信号；
- 额定电压 24V，单点额定电流为 1A；
- 带有 LED 显示，输入输出状态一目了然。

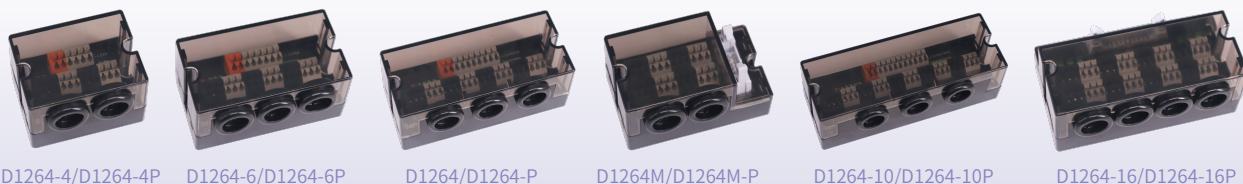

分类

总线模块

端子台

继电器模组

电缆线


传感器

## 规格参数


额定电流	1A
额定电压	DC24V
适用端子	E0308/E0310 针型端子

## 外形图


D1264-4/D1264-4P

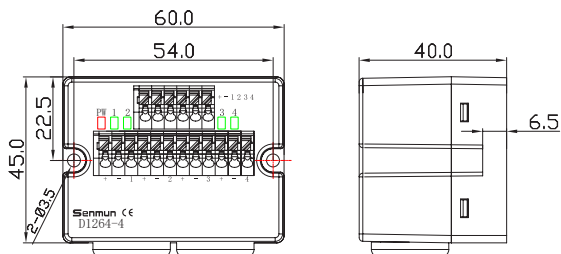


D1264-6/D1264-6P

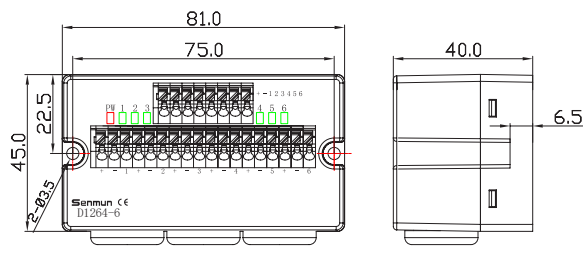


D1264/D1264-P

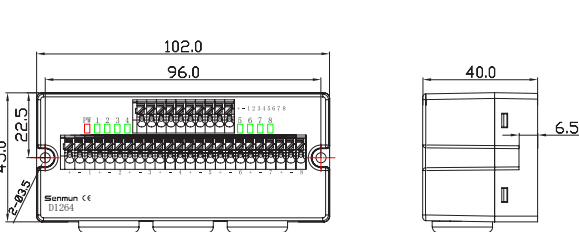


D1264M/D1264M-P

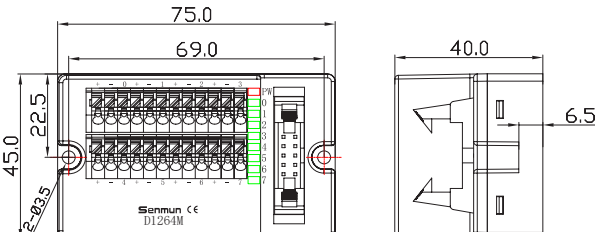

D1264-10/D1264-10P

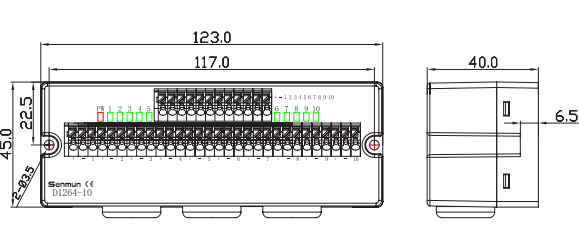


D1264-16/D1264-16P

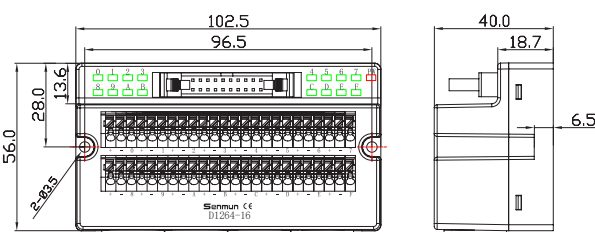


选型指南

配线图


D1264-4




D1264-4P




D1264-6




D1264-6P




D1264




D1264-P




D1264M




D1264M-P




D1264-10




D1264-10P



D1264-16

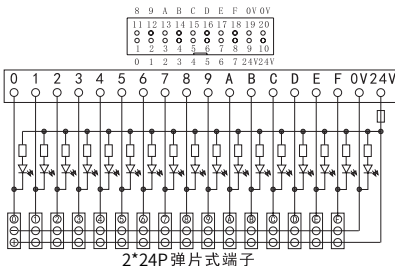

D1264-16P

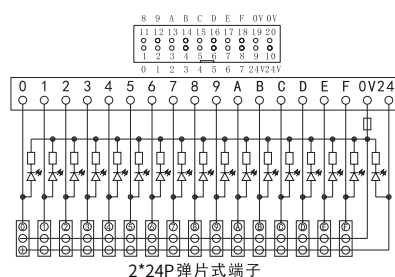

分类

总线模块

端子台

继电器模组

电缆线

传感器

选型指南