

7/8 预铸连接线



产品特点

- 损耗小，抗干扰，导电优良；
- 耐磨损，抗拉伸持久耐用；
- 传输稳定使用寿命长。



分类

总线模块

端子台


继电器模组

电缆线

传感器

命名规则


X092-5A01G-1000MM

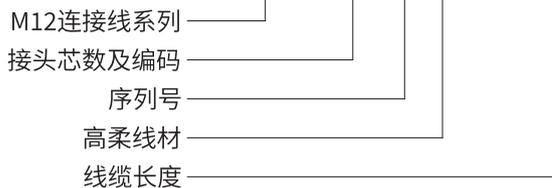


备注：最短线长为 500MM，如需增加以 500MM 为单位递增。

接头尺寸


直头插针




直头插孔



弯头插针



弯头插孔



选型指南

规格参数

名称	7/8预铸连接线	
芯数	5芯	
型号	X092-5A01	X092-5A08
	X092-5A02	X092-5A09
	X092-5A03	X092-5A10
	X092-5A04	X092-5A11
	X092-5A05	X092-5A12
	X092-5A06	X092-5A13
	X092-5A07	X092-5A14
线材外径	9.8mm	
线缆规格	5C*1.5mm ²	
工作电压	最大300V	
防护等级	IP67	
线缆外被	PVC PUR	

正视图


芯数	5芯
针型	
孔型	

外形图

7/8预铸连接线(插针型)

型号	连接器类型	外形图
X092-5A01	针端直头转针端直头	
X092-5A02	针端弯头转针端直头	
X092-5A03	针端弯头转针端弯头	
X092-5A04	针端直头转散线	
X092-5A05	针端弯头转散线	

7/8预铸连接线(插孔型)

型号	连接器类型	外形图
X092-5A06	孔端直头转孔端直头	
X092-5A07	孔端弯头转孔端直头	
X092-5A08	孔端弯头转孔端弯头	
X092-5A09	孔端直头转散线	
X092-5A10	孔端弯头转散线	

7/8预铸连接线(插针插孔型)

型号	连接器类型	外形图
X092-5A11	针端直头转孔端直头	
X092-5A12	针端弯头转孔端直头	
X092-5A13	针端直头转孔端弯头	
X092-5A14	针端弯头转孔端弯头	

分类

总线模块

端子台

继电器模组

电缆线

传感器

选型指南